

# Skylar Hi-Bay



- Efficacies up to 160lm/W
- Impact rating of IK10
- IP40 as Standard, IP65 available on request
- Nominal life-time of 80,000h (L90/B10)
- Colour stability with 3 step MacAdam
- Body and gear tray - aluminium extrusion
- Optics - polycarbonate
- Colours: Anodised Silver as standard, RAL 9003 White, RAL 9005 Black
- Lengths available: 320mm, 640mm and 960mm
- Emergency lumen output of 750 Lumens

## Options



For Emergency suffix  
For DALI dimmable  
For casambi enabled suffix  
For integral sensor suffix\*  
For batten mount sensor  
For self-test suffix  
For addressable emergency suffix  
\*not available on Skylar 1

/EMR  
/DIM  
/CAS  
/SEN  
/BSEN  
/ST  
/EMP


## Accessories

Wire suspension kit 2m  
Wire suspension kit 5m  
Surface mount kit  
Trunking mount kit

SKY/WIRE/2M  
SKY/WIRE/5M  
SKY/SURF  
SKY/TRUNK

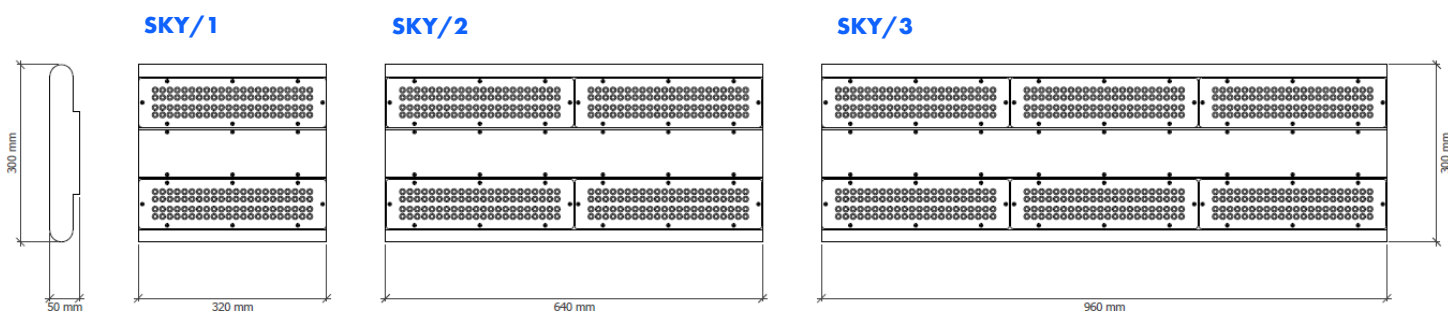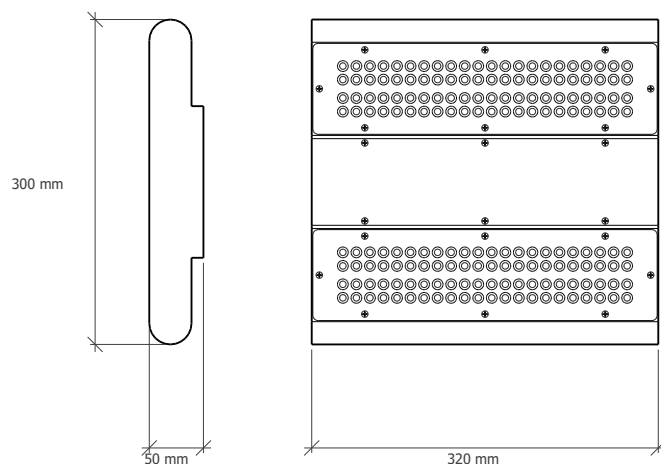


# Skylar Hi-Bay

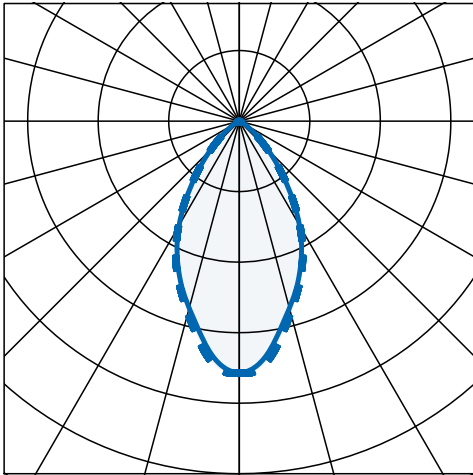


## 60° Optic

| Part No.          | Lm    | W   | Lm/W | Weight | L (mm) |
|-------------------|-------|-----|------|--------|--------|
| SKY/1/60D/5000/4  | 5198  | 34  | 154  | 3.6 kg | 320    |
| SKY/1/60D/7000/4  | 7097  | 47  | 151  | 3.6 kg | 320    |
| SKY/1/60D/10000/4 | 9673  | 67  | 145  | 3.6 kg | 320    |
| SKY/1/60D/13000/4 | 13560 | 100 | 135  | 3.6 kg | 320    |
| SKY/2/60D/16000/4 | 16253 | 106 | 153  | 6.2 kg | 640    |
| SKY/2/60D/20000/4 | 19576 | 132 | 148  | 6.2 kg | 640    |
| SKY/2/60D/23000/4 | 23329 | 163 | 143  | 6.2 kg | 640    |
| SKY/2/60D/26000/4 | 26532 | 201 | 132  | 6.4 kg | 640    |
| SKY/3/60D/29000/4 | 28596 | 204 | 128  | 8.1 kg | 960    |
| SKY/3/60D/32000/4 | 31216 | 251 | 125  | 8.1 kg | 960    |
| SKY/3/60D/34000/4 | 33355 | 271 | 123  | 8.1 kg | 960    |
| SKY/3/60D/36000/4 | 35241 | 290 | 122  | 8.1 kg | 960    |

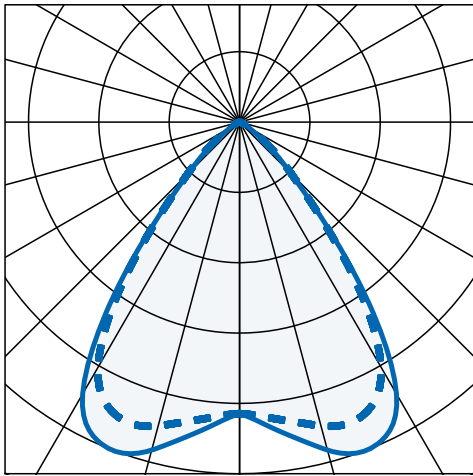


## 90° Optic

| Part No.          | Lm    | W   | Lm/W | Weight | L (mm) |
|-------------------|-------|-----|------|--------|--------|
| SKY/1/90D/5000/4  | 5334  | 34  | 158  | 3.6 kg | 320    |
| SKY/1/90D/7000/4  | 7176  | 47  | 152  | 3.6 kg | 320    |
| SKY/1/90D/10000/4 | 9761  | 67  | 146  | 3.6 kg | 320    |
| SKY/1/90D/13000/4 | 13665 | 100 | 136  | 3.6 kg | 320    |
| SKY/2/90D/16000/4 | 16510 | 106 | 156  | 6.2 kg | 640    |
| SKY/2/90D/20000/4 | 20101 | 132 | 152  | 6.2 kg | 640    |
| SKY/2/90D/23000/4 | 23847 | 163 | 146  | 6.2 kg | 640    |
| SKY/2/90D/26000/4 | 27366 | 201 | 136  | 6.4 kg | 640    |
| SKY/3/90D/29000/4 | 29803 | 226 | 132  | 8.1 kg | 960    |
| SKY/3/90D/32000/4 | 32460 | 250 | 130  | 8.1 kg | 960    |
| SKY/3/90D/34000/4 | 34880 | 270 | 129  | 8.1 kg | 960    |
| SKY/3/90D/36000/4 | 36932 | 290 | 127  | 8.1 kg | 960    |

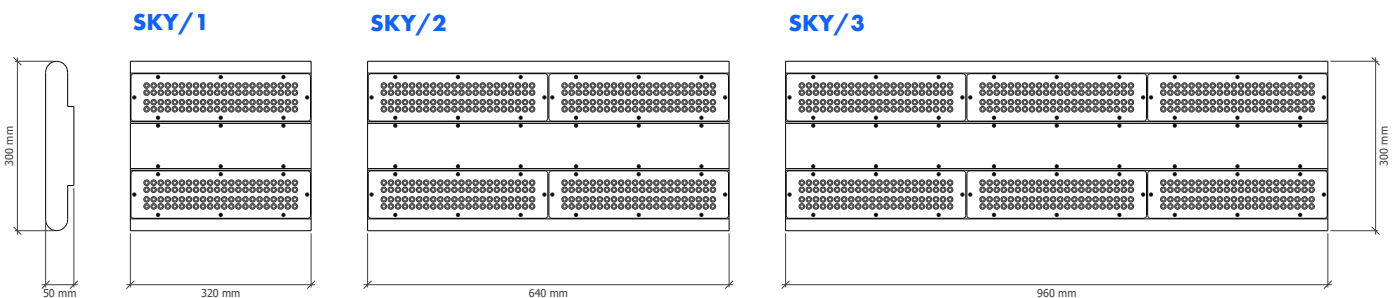


# Skylar Hi-Bay

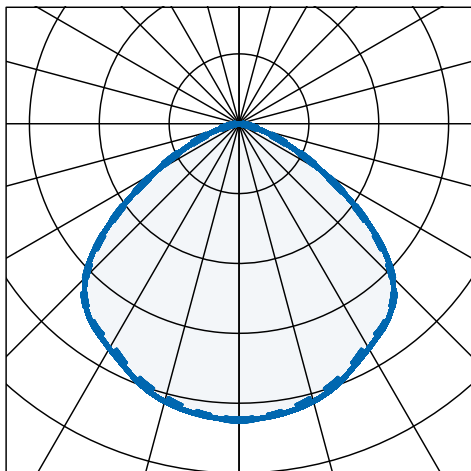

## 110° Optic

| Part No.           | Lm    | W   | Lm/W | Weight | L (mm) |
|--------------------|-------|-----|------|--------|--------|
| SKY/1/110D/5000/4  | 5324  | 33  | 160  | 3.6 kg | 320    |
| SKY/1/110D/7000/4  | 7163  | 47  | 152  | 3.6 kg | 320    |
| SKY/1/110D/10000/4 | 9743  | 67  | 146  | 3.6 kg | 320    |
| SKY/1/110D/13000/4 | 13640 | 100 | 136  | 3.6 kg | 320    |
| SKY/2/110D/16000/4 | 16480 | 106 | 156  | 6.2 kg | 640    |
| SKY/2/110D/19000/4 | 19485 | 132 | 148  | 6.2 kg | 640    |
| SKY/2/110D/23000/4 | 23779 | 166 | 143  | 6.2 kg | 640    |
| SKY/2/110D/26000/4 | 27280 | 201 | 136  | 6.4 kg | 640    |
| SKY/3/110D/29000/4 | 30378 | 226 | 135  | 8.1 kg | 960    |
| SKY/2/110D/32000/4 | 33086 | 250 | 132  | 8.1 kg | 960    |
| SKY/3/110D/34000/4 | 35553 | 270 | 132  | 8.1 kg | 960    |
| SKY/3/110D/36000/4 | 37644 | 290 | 130  | 8.1 kg | 960    |

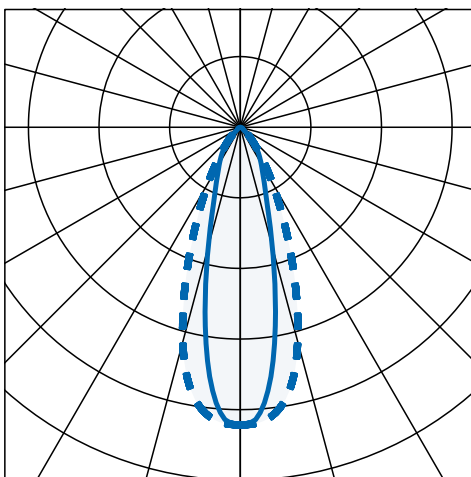

## High Rack Optic

| Part No.         | Lm    | W   | Lm/W | Weight | L (mm) |
|------------------|-------|-----|------|--------|--------|
| SKY/1/HR/5000/4  | 5113  | 34  | 152  | 3.6 kg | 320    |
| SKY/1/HR/7000/4  | 6935  | 47  | 148  | 3.6 kg | 320    |
| SKY/1/HR/10000/4 | 9551  | 67  | 143  | 3.6 kg | 320    |
| SKY/1/HR/13000/4 | 13338 | 100 | 133  | 3.6 kg | 320    |
| SKY/2/HR/16000/4 | 15951 | 106 | 150  | 6.2 kg | 640    |
| SKY/2/HR/20000/4 | 19402 | 132 | 147  | 6.2 kg | 640    |
| SKY/2/HR/23000/4 | 23111 | 163 | 142  | 6.2 kg | 640    |
| SKY/2/HR/26000/4 | 26041 | 201 | 130  | 6.4 kg | 640    |
| SKY/3/HR/29000/4 | 28540 | 224 | 127  | 8.1 kg | 960    |
| SKY/3/HR/32000/4 | 31013 | 249 | 125  | 8.1 kg | 960    |
| SKY/3/HR/34000/4 | 33070 | 269 | 123  | 8.1 kg | 960    |
| SKY/3/HR/36000/4 | 35066 | 290 | 121  | 8.1 kg | 960    |

